

At a Glance

Applications



Freeze prevention



Temperature maintenance



Pipelines



Silos, vessels, tanks

- › Chemistry and Petrochemistry
- › Maritime and offshore
- › Food Processing Industry
- › Water and sanitation utilities

Benefits

- › Four nominal outputs
- › UV-resistant
- › Moisture proof

Designs

- AO** Aluminium foil, TPE-O outer jacket
- BO** Protective braid, TPE-O outer jacket
- BOT** Protective braid, Fluoropolymer outer jacket


Approvals



- › Trace Heater classification
 - II 2G Ex 60079-30-1 IIC Gb
 - II 2D Ex 60079-30-1 IIIC Db
- › System classification
 - II 2G Ex 60079-30-1 eb IIC T6 Gb
 - II 2D Ex 60079-30-1 tb IIIC T85°C Db
- › Certification
 - IECEx EPS 18.0064 U
 - IECEx EPS 19.007 X
 - EPS 18 ATEX 1133 U
 - EPS 19 ATEX 1014 X
 - CML 21 UKEX 3808 U
 - CML 21 UKEX 3949 X

ELSR-N

up to 80 °C

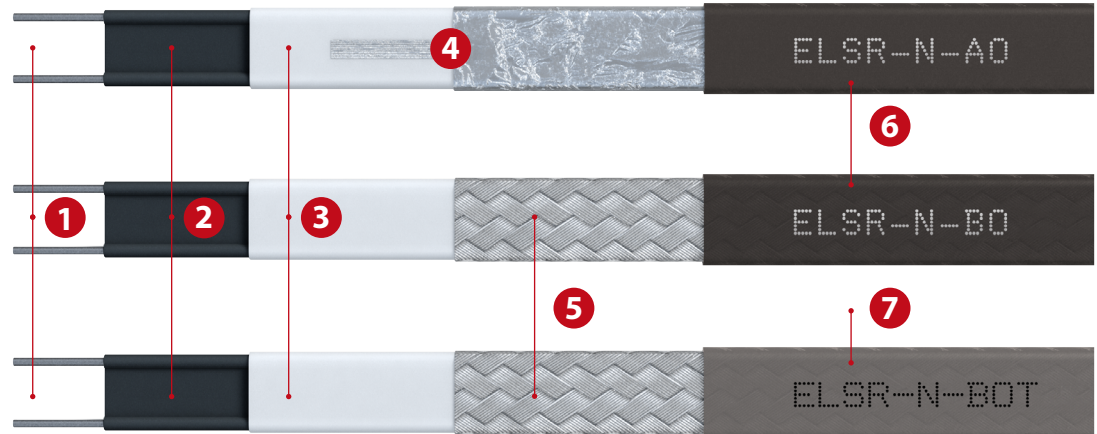

1 Bus wire	Nickel plated copper, 1.23 mm ²
2 Self-regulating heating element	
3 Insulation	
4 Protective conductor connection	see 5 or Cu, tin plated with aluminium foil
5 Protection	Protective braid (Cu, tin plated)
6 Outer jacket	TPE-O
7 Outer jacket	FEP

Checklist

Power Connection & End Termination

ELVB-SRAN-Ex-20	Power connection, cold assembly, gland M20, brass, Ex d e	0X81PND
EL-ECN-Ex	Silicone termination cap black, cold assembly, with ex marking	0X81EN1
ELVB-SREx-25	Power connection, cold assembly, gland M25 x 1,5, PE, Ex e	0X81PA1
Ex-Con-SR	Ex connection sleeve Ø 36 x 210 mm 4J	0X81125
ELVB-SREx-IT	Power connection, cold assembly, without gland	091AIT1
ELVB-SRA-25	Power connection, cold assembly, gland M25 x 1,5, PE	091A010
EL-ECN	Silicone termination cap, cold assembly, transparent	09112N1
ELVB-SRV-N-L-W	Splice set, shrink-fit	0911116
El-Clic P	Fast connector with 2.5m cold lead H05 SS-F 3 G 1,5	09ClicP
El-Clic S	Fast connector T-splice	09ClicS

Junction Boxes

ELAK-Ex-4.01	122 x 120 x 90 mm, polyester, IP66, 1 - 3 Trace heaters, 1 Power cable	0X85401
Ex-it-R	Ø 150 x 125 mm, 3 Trace heaters, 1 Pt100, incl. mounting stand	0X80070
ELAK-5	122 x 120 x 90 mm, polyester, 3 breakouts M25, IP 66	0920013
ELAK-RS-T	150 x 125 mm, twin Pt100, 3 heaters incl. mounting stand, IP 65	0920059



Technical Information

Max. continuous exposure temperature (power on)	65 °C
Max. intermittent exposure temperature (de-energized)	80 °C
Nominal voltage*	230 V
Min. Bending radius	25 mm
Min. Installation temperature	- 60 °C

* Further power inputs on request

Heating circuit length

Switch on temperature [°C]	Nominal fuse rating [A]	Heating circuit length*1 [m]			
		ELSR-N-10-2	ELSR-N-20-2	ELSR-N-30-2	ELSR-N-40-2
10	10	128.0	68.0	52.0	48.0
	16	177.0	109.0	83.0	77.0
	20	177.0	129.0	104.0	98.0
	25	177.0	129.0	113.0	102.0
	32	177.0	129.0	113.0	102.0
0	10	106.0	57.0	45.0	40.0
	16	160.0	92.0	71.0	64.0
	20	160.0	115.0	89.0	79.0
	25	160.0	119.0	105.0	102.0
	32	160.0	119.0	105.0	102.0
-10	10	90.0	50.0	39.0	32.0
	16	144.0	79.0	63.0	55.0
	20	149.0	99.0	78.0	68.0
	25	149.0	111.0	98.0	87.0
	32	149.0	111.0	98.0	102.0
-20	10	78.0	44.0	35.0	28.0
	16	125.0	70.0	56.0	47.0
	20	139.0	87.0	69.0	60.0
	25	139.0	104.0	87.0	76.0
	32	139.0	104.0	87.0	102.0
-40	10	62.0	35.0	28.0	25.0
	16	99.0	56.0	45.0	38.0
	20	124.0	71.0	57.0	49.0
	25	124.0	88.0	71.0	61.0
	32	124.0	88.0	71.0	81.0


*1 Heating circuit lengths on the following conditions

- 230 V nominal voltage
- Delayed action circuit breakers (C-characteristic) with 80 % max. load
- Maximum 10 % line voltage drop on heating cable bus wire
- Power connection to one heater end
- In certain installation situations, the heating circuit length may vary. Please contact our engineers.

Power output

ELSR-N-xx-2-xx Power

(on insulated metallic pipes in accordance with EN 62395-1)

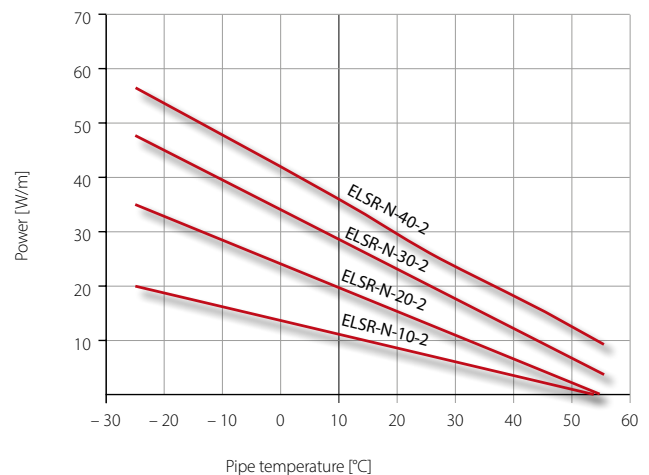

Ordering Information

Type	Nominal output [at 10°C]	WxH approx. [mm]	Weight approx. [g/m]	Article - No.
ELSR-N-10-2-AO	10 W/m	13.6 x 5.5	91	B0200130
ELSR-N-10-2-BO	10 W/m	14.1 x 5.8	108	B0200110
ELSR-N-10-2-BOT	10 W/m	13.8 x 5.6	108	B0200119
ELSR-N-20-2-AO	20 W/m	13.6 x 5.5	91	B0200230
ELSR-N-20-2-BO	20 W/m	14.1 x 5.8	108	B0200210
ELSR-N-20-2-BOT	20 W/m	13.8 x 5.6	108	B0200219
ELSR-N-30-2-AO	30 W/m	13.6 x 5.5	91	B0200330
ELSR-N-30-2-BO	30 W/m	14.1 x 5.8	108	B0200310
ELSR-N-30-2-BOT	30 W/m	13.8 x 5.6	108	B0200319
ELSR-N-40-2-AO	40 W/m	13.6 x 5.5	91	B0200430
ELSR-N-40-2-BO	40 W/m	14.1 x 5.8	108	B0200410
ELSR-N-40-2-BOT	40 W/m	13.8 x 5.6	108	B0200419